





WEICON

APPLICATIONS AND PRODUCTS



courtesy and copyright of ShibataFenderTeam



www.weicon.com/app



www.weicon.com

V 1.21

Never stop learning



WE explain

now here




ALWAYS THE RIGHT SOLUTION

We don't just sell products, we offer solutions – worldwide. No matter where, we find the right answers to our customers' application requests.

Whether protective coatings on pump housings, pipe connections and hydraulic lines, repairs of conveyor belts, drive shafts and evaporators, or bonding of salt stones, stainless steel plates or roller journals – the WEICON product range is versatile and suitable for every application.

Restoring a tool machine bed



VIDEO

Description:

- ▶ removal of the initial cast coating by heating to above 200 °C
- ▶ application of a new coating by casting the epoxy resin system WEICON WR
- ▶ important: slight overfilling of the space to be filled
- ▶ after curing mechanical processing of the surface by milling and inserting cooling ducts



Advantage of our solution:

- ▶ no replacement of the tool machine necessary thanks to cost-effective repair



WEICON WR

- ▶ 0.5 kg 10300005
- ▶ 2.0 kg 10300020



Repair of the fan housing of a ventilator



Description:

- ▶ pre-treatment with sandblasting (SA 2½)
- ▶ replacing the missing material surface by inserting a stainless steel sheet
- ▶ cleaning the entire surfaces to be coated with WEICON Cleaner Spray S
- ▶ sanding the stainless steel sheet to improve surface roughness
- ▶ application of WEICON A to build up basic coating on the inside and outside
- ▶ after curing: smoothing and sanding the excess material
- ▶ WEICON Cleaner Spray S
- ▶ application of WEICON Ceramic BL as finish
- ▶ for visual upgrading and as corrosion protection application of WEICON Rust Protection 2000 Plus



WEICON A

- ▶ 0.5 kg 10000005
- ▶ 2.0 kg 10000020

Rust Protection 2000 PLUS

- ▶ 400 ml
- 11013400
- silver-grey



WEICON Ceramic BL

- ▶ 0.5 kg 10400005
- ▶ 2.0 kg 10400020

Advantage of our solution:

- ▶ cost-effective repair and avoiding a replacement with long delivery times

Bonding a logo to a sign



Description:

- ▶ cleaning both bonding surfaces with WEICON Surface Cleaner
- ▶ application of WEICON Primer K 200 to the plastic surface of the sign
- ▶ application of WEICON Mounting Tape as spacer for the bonding gap and to support the initial adhesive strength
- ▶ application of WEICON Flex 310 M® Super-Tack
- ▶ joining the parts




Primer K 200

▶ 250 ml
13550225



Mounting Tape

14050319
grey



Flex 310 M® Super-Tack

▶ 290 ml
13652290
grey



Advantage of our solution:

- ▶ fast, cost-effective adhesive bond in line with the design
- ▶ alternative to screws, no visible joints

Repair of a drive shaft



Description:

- ▶ reducing the drive shaft to an undersize of > 3 mm
- ▶ creating a barrier (tape) to remove access material in uncured state
- ▶ circumferential application of WEICON HB 300 in a layer thickness of approx. > 5 mm
- ▶ after curing (24 h), the repaired area is reduced to the desired size

VIDEO



WEICON HB 300


- ▶ 0.5 kg 10450005
- ▶ 1.0 kg 10450010



Advantage of our solution:

- ▶ fast and cost-effective repair
- ▶ avoiding long delivery times
- ▶ fast recommissioning of the system
- ▶ cost savings of approx. 8,000 EUR compared to a replacement

Coating a pump housing

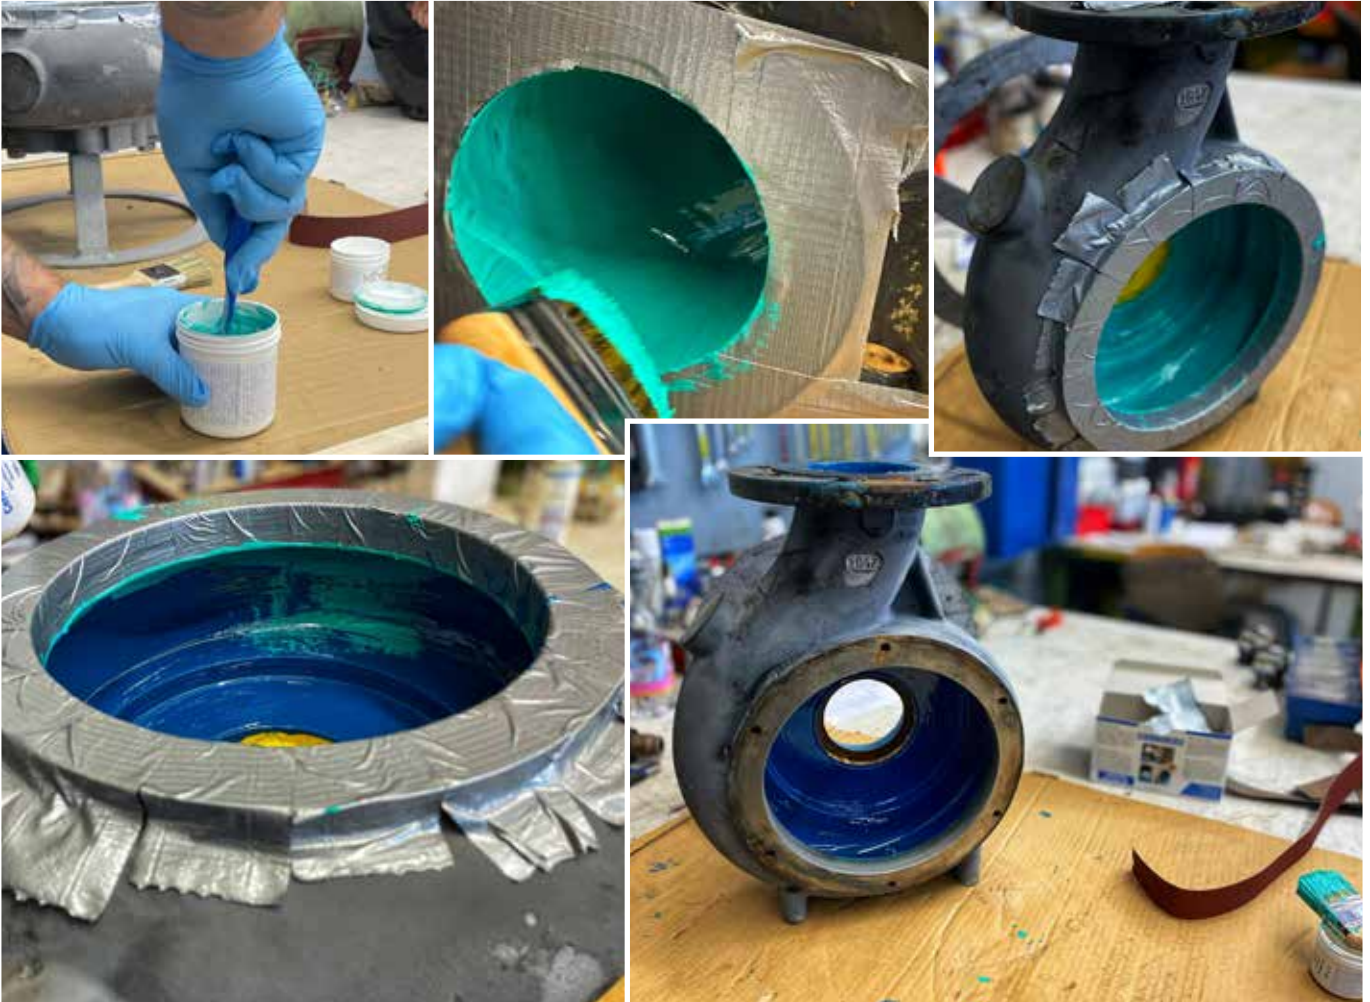

Description:

- ▶ cleaning with WEICON Cleaner Spray S
- ▶ first application with WEICON GL as base coat and control layer
- ▶ second application with WEICON Ceramic BL as wear protection



WEICON GL NEW

- ▶ 0.5 kg 10700005
- ▶ 1.0 kg 10700010



Advantage of our solution:

- ▶ better adhesion of the wear protection layer WEICON Ceramic BL due to filling the pinholes with WEICON GL
- ▶ cost-effective repair
- ▶ no replacement of the component necessary



WEICON Ceramic BL

- ▶ 0.5 kg 10400005
- ▶ 2.0 kg 10400020



Production of axle boots



Description:

- ▶ cleaning the mould with WEICON Cleaner Spray S
- ▶ pre-treatment with WEICON Mould Release Agent
- ▶ casting the axle boots with WEICON Urethane 45



Urethane 45

Shore hardness: A 45

- ▶ 500 g
- ▶ 10514005



Advantage of our solution:

- ▶ cost-effective reproduction of various geometric shapes

VIDEO



Creating a ceramic abrasion protection in pipe connections



Description:

- ▶ cleaning with Cleaner Spray S
- ▶ sandblasting (SA 2 1/2)
- ▶ repeated cleaning with Cleaner Spray S
- ▶ inserting/bonding of the ceramics with the epoxy resing system WEICON WAL 04



WEICON WAL 04

▶ 2.0 kg
10470020



Advantage of our solution:

- ▶ strong adhesion between WAL 04 and the steel component
- ▶ restoration of the abrasion protection

Repair of conveyor belts in a quartz mine



Description:

- ▶ removing coarse dirt
- ▶ roughening and levelling the damaged areas with an angle grinder (rasp disc or cup wheel)
- ▶ cleaning the surface with WEICON Cleaner Spray S
- ▶ mixing and applying WEICON Primer G with a paint brush
- ▶ allow WEICON Primer G sufficient time to flash off
- ▶ depending on the container application of WEICON Urethane 85
- ▶ smoothing the surface with WEICON Contour Spatula Flexy



Belt Repair-Kit 550

- ▶ 500 g + Primer G 50 g
- 10851005



Dispenser 2C 10:1

Recommended for the 2-component 540g cartridge

10653491



VIDEO



Belt Repair-Kit 590

- ▶ 540 g + Primer G 50 g
- 10851015

Advantage of our solution:

- ▶ very cost-effective way to restore the functioning of the conveyor belts and thus extension of the service life
- ▶ versatile application possibilities

Bonding a wheel and gearwheel in a gravel plant



Description:

- ▶ cleaning with WEICON Surface Cleaner
- ▶ high-alloy and hardened steels are bonded with WEICONLOCK AN 306-38 Retaining Cylindrical Assemblies, applied in a circumferential and full-surface bead



Advantage of our solution:

- ▶ high frictional connection with high radial and axial forces

WEICONLOCK AN 306-38

- | | | | |
|----------|----------|----------|----------|
| ▶ 10 ml | ▶ 20 ml | ▶ 50 ml | ▶ 200 ml |
| 30638110 | 30638020 | 30638150 | 30638200 |

Repair of stirring units in a gold mine



Description:

- ▶ abrasion on stirring units/propellers caused by sand and stones
- ▶ sandblasting (SA 2½) and cleaning with Cleaner Spray S
- ▶ reconditioning of the propeller blades by coating with WEICON WP
- ▶ 16 kilograms were used




WEICON WP

- ▶ 2.0 kg ▶ 10.0 kg
- 10490020 10490100

Advantage of our solution:

- ▶ restoring the efficiency of the stirring units
- ▶ durable abrasion protection for longer service life

Repair of the end cover of a seawater filter on a yacht

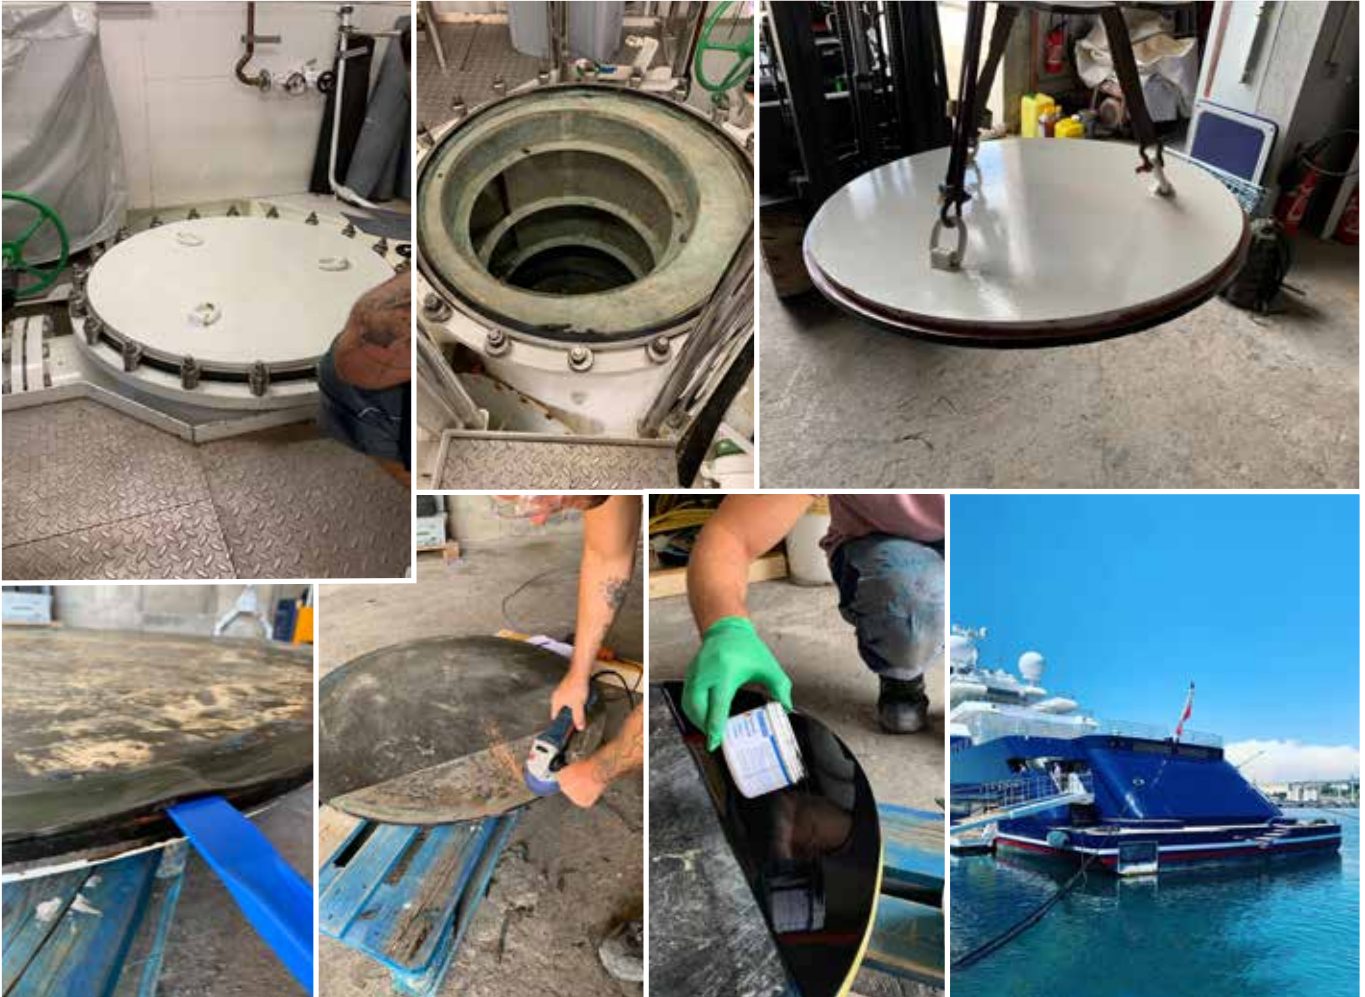

Description:

- ▶ repairing damages on the end covers, which had been caused by mounting errors
- ▶ cutting out and removing the damaged area
- ▶ additional roughening and sanding of material residues with an angle grinder
- ▶ enclosing the damaged area with a common tape
- ▶ cleaning the sanded surface with WEICON Cleaner Spray S
- ▶ even casting of the WEICON Urethane 80



Advantage of our solution:

- ▶ fast on-site repair during ongoing use of the yacht
- ▶ high layer build-up and wear protection thanks to the self-levelling WEICON Urethane 80



Urethane 80

Shore hardness: A 80

▶ 500 g

10518005

Lining a machine/robot foot



Description:

- ▶ adjusting/ leveling the foot
- ▶ building a formwork
- ▶ sealing the formwork with WEICON Flex 310 M® Classic
- ▶ mixing and casting WEICON CBC until reaching the fill level
- ▶ 36 kilograms WEICON CBC were used



WEICON CBC Chocking Backing Compound

- ▶ 3.0 kg (2.0 l) ▶ 10.0 kg (6.6 l)
- 10110030 ▶ 10110110



Flex 310 M® Classic

- ▶ 310 ml
- 13305310
- grey



Advantage of our solution:

- ▶ complete force and form closure through casting
- ▶ precise levelling of the surface of the foot
- ▶ very high impact strength and damping capacity of vibrations



Bonding polyethylene strips to aluminium rails



Description:

- ▶ polyethylene strips are bonded to aluminium rails
- ▶ the PE layer serves as a sliding guide for plastic strips (strapping technology)
- ▶ due to the small bonding gap and the material properties of the polyethylene, WEICON CA-Primer was used in combination with WEICON Contact VA 30 Black



Advantage of our solution:

- ▶ high-strength bond despite low surface energy plastic



Contact Primer
for polyolefins

▶ 10 ml
12450010



VA 30 Black

▶ 12 g 12603012 ▶ 30 g 12603030 ▶ 60 g 12603060

Bonding the inner thread of a pneumatic hammer



Description:

- ▶ cleaning the thread surfaces on the inside and outside with WEICON Surface Cleaner
- ▶ application of WEICONLOCK AN 305-77 Thread Sealing
- ▶ assembly of both components



WEICONLOCK AN 305-77

- ▶ 50 ml 30577150
- ▶ 200 ml 30577200
- ▶ 300 ml 30577300

Advantage of our solution:

- ▶ securely locked screw joints during use of the pneumatic hammer
- ▶ easy disassembly in case maintenance is required
- ▶ the hammer works under continuous load at 1,500 strokes per minute



Levelling PUR wear protection plates in mill construction



Description:

- ▶ providing the joint area of the wear protection plates with a V-cut
- ▶ cleaning with WEICON Brake Cleaner
- ▶ masking the areas left and right of the joint with tape to remove excess material
- ▶ application of WEICON Primer G (observe flash-off time!)
- ▶ application of WEICON Urethane 85 from double cartridge with mixing nozzle
- ▶ levelling with a spatula
- ▶ accessories: Dispenser 2C 10:1 490 ml



Urethane 85 **NEW**

Shore hardness: A 85

▶ 500 g
10800005
Work Package

▶ 540 g
10800540
Cartridge

Primer G **NEW**

Special bonding agent for urethanes for the pre-treatment of rubber and metal surfaces

▶ 50 g
10809050



Dispenser 2C 10:1

Recommended for the 2-component 540g cartridge

10653491

Advantage of our solution:

- ▶ easy application
- ▶ even transition on the joint area, thus less surface for wear to attack
- ▶ more efficient rotation in the mill



Mounting stoneware sewers with plastic pipes

Description:

- ▶ installation of a dosing system due to the large material consumption
- ▶ gap-filling and bonding with generous application of WEICON Flex 310 M® 2 K
- ▶ with this type of drum dosing system, the adhesive is mixed only in the mixing nozzle

Flex 310 M® 2 K

- ▶ 250 ml
13305250
grey
- ▶ special mixing nozzle
13309997

Advantage of our solution:

- ▶ compared to other adhesives: elasticity, tolerance compensation, good sealing effect, high adhesive strength and curing independent of ambient conditions thanks to 2C system
- ▶ adhesive is only mixed in the mixing nozzle

Repair of a pump impeller



Description:

- ▶ surface pre-treatment with sandblasting (SA 2 ½)
- ▶ cleaning the entire surface with WEICON Cleaner Spray S
- ▶ application of WEICON ST to restore the impeller strength
- ▶ sanding the entire repaired surface
- ▶ cleaning the sanded surface with WEICON Cleaner Spray S
- ▶ application of WEICON Ceramic BL as final coating/finish (in two layers)



WEICON ST

▶ 0.5 kg 10410005 ▶ 2.0 kg 10410020



WEICON Ceramic BL

▶ 0.5 kg 10400005 ▶ 2.0 kg 10400020



Advantage of our solution:

- ▶ cost-effective repair instead of replacement
- ▶ durable protection against cavitation



Repairing the foundation of a conveyor system in a copper mine



Description:

- ▶ removing loose foundation parts
- ▶ creating formwork for the area to be repaired
- ▶ casting WEICON CBC into the formwork
- ▶ after curing: removing the formwork
- ▶ 1,700 kilograms WEICON CBC were used



WEICON CBC
Chocking Backing Compound


- ▶ 3.0 kg (2.0 l) ▶ 10.0 kg (6.6 l)
- 10110030 10110110

Advantage of our solution:

- ▶ increasing the safety and restoring the stability of the conveyor system



Bonding the cooler of an electric race car

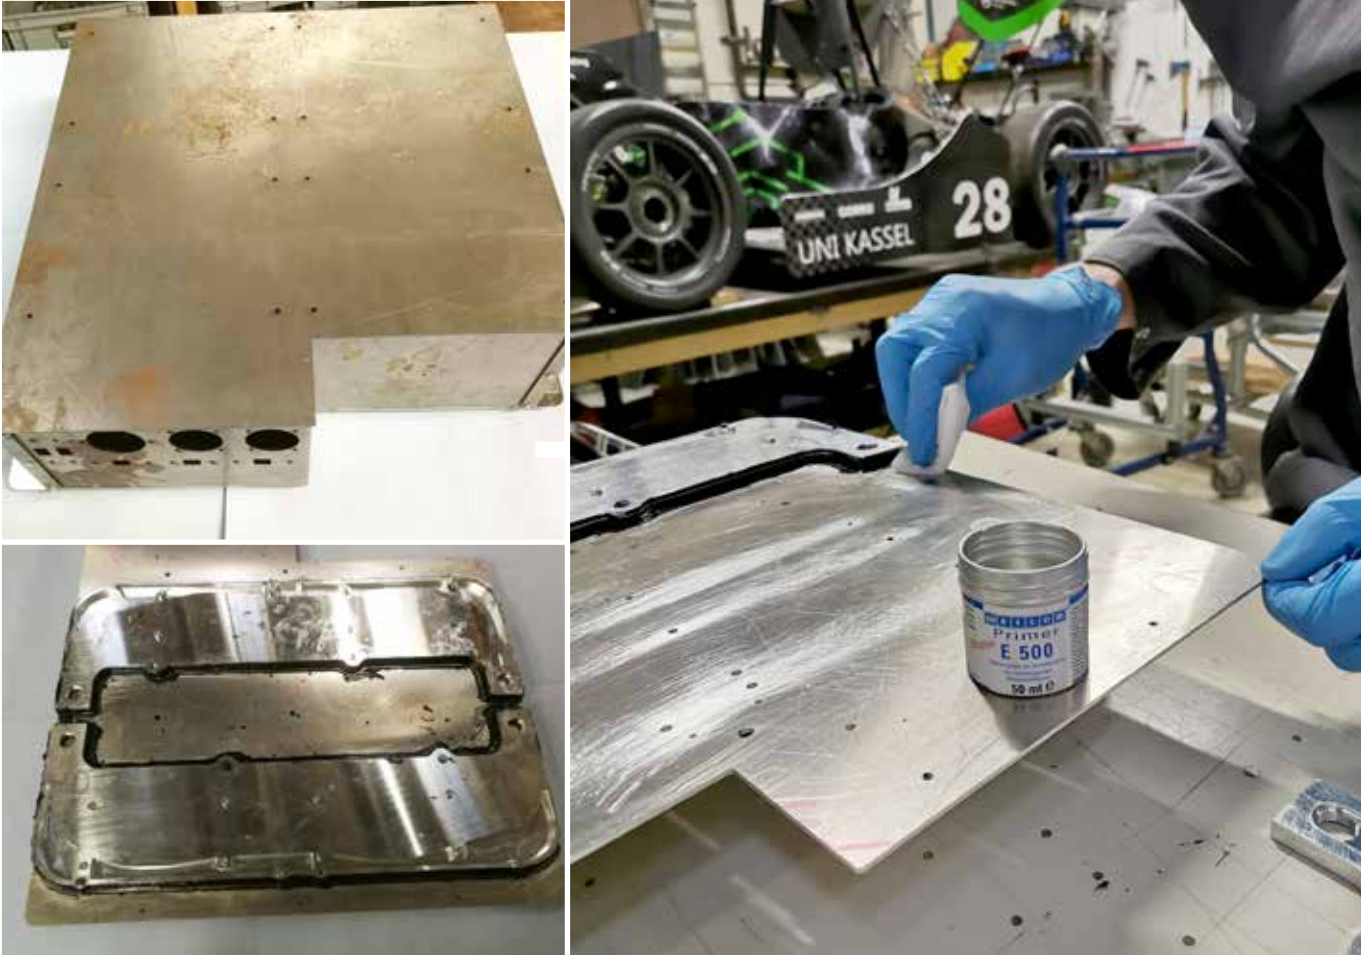

Description:

- ▶ roughening the surface with emery cloth
- ▶ cleaning with WEICON Surface Cleaner
- ▶ application of WEICON Primer E 500 with clean, lint-free cloth
- ▶ leave Primer to flash off for approx. 10 to 20 minutes
- ▶ application of WEICON Black-Seal with Press Pack
- ▶ join the parts



Primer E 500

▶ 250 ml
13558025



Black-Seal Special Silicone

▶ 200 ml
13051200
Press Pack



Advantage of our solution:

- ▶ easy application for building prototypes and small batches
- ▶ high temperature resistance
- ▶ no material distortion as caused by welding or soldering
- ▶ compensates production tolerances

Repair of a polyethylene tank used in agriculture




Description:

- ▶ cleaning with WEICON Surface Cleaner
- ▶ application of WEICON Easy-Mix PE-PP 45
- ▶ application of the Glass Fibre Cloth Tape
- ▶ second application of WEICON Easy-Mix PE-PP 45 to the tape
- ▶ spreading the adhesive by hand (gloves)
- ▶ curing: 24 hours at room temperature



Easy-Mix PE-PP 45

▶ 45 ml
10660045
pale yellow, transparent



Dispenser PE-PP

10663038

Mixing Nozzle PE-PP

10660002

Special Piston

10663110

To convert the Dispenser Easy-Mix D 50 to Easy-Mix PE-PP 45

Advantage of our solution:

- ▶ fast and cost-effective repair
- ▶ preventing environmental damages
- ▶ replacement of the tank not necessary

Repair and restoration of pumps in a tomato factory



Description:

- ▶ surface pre-treatment with sandblasting (SA 2½)
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ application of WEICON WR2 to fill cavitation damages
- ▶ final coating as wear protection with WEICON Ceramic BL



WEICON WR2

- ▶ 0.5 kg
10350005
- ▶ 2.0 kg
10350020



WEICON Ceramic BL

- ▶ 0.5 kg
10400005
- ▶ 2.0 kg
10400020



Advantage of our solution:

- ▶ restoration of the full pump capacity
- ▶ avoiding higher costs of 1,800 EUROS

Restoring a corroded flange surface



Description:

- ▶ Surface pre-treatment by sandblasting with corundum (SA 2½)
- ▶ dehumidifying the surface with acetylene oxygen torch
- ▶ roof-shaped application of WEICON HB 300 to the flange surface with the help of WEICON Contour Spatula Flexy
- ▶ using a steel sheet to copy the flange surface
- ▶ coating of the steel sheet with WEICON Mould Release Agent Wax P 500
- ▶ placement and assembly of the steel sheet to the desired dimension
- ▶ after 24 hours cure time: removal of the steel sheet
- ▶ initial flange surface is restored



Mould Release Agent Wax P 500

- ▶ 150 g ▶ 500 g
- 10604515 10604500



WEICON HB 300


- ▶ 0.5 kg ▶ 1.0 kg
- 10450005 10450010

Advantage of our solution:

- ▶ fast and easy repair solution compared to long delivery times and replacement costs
- ▶ extension of the service life of the entire component



Repair of a shell and tube cooler

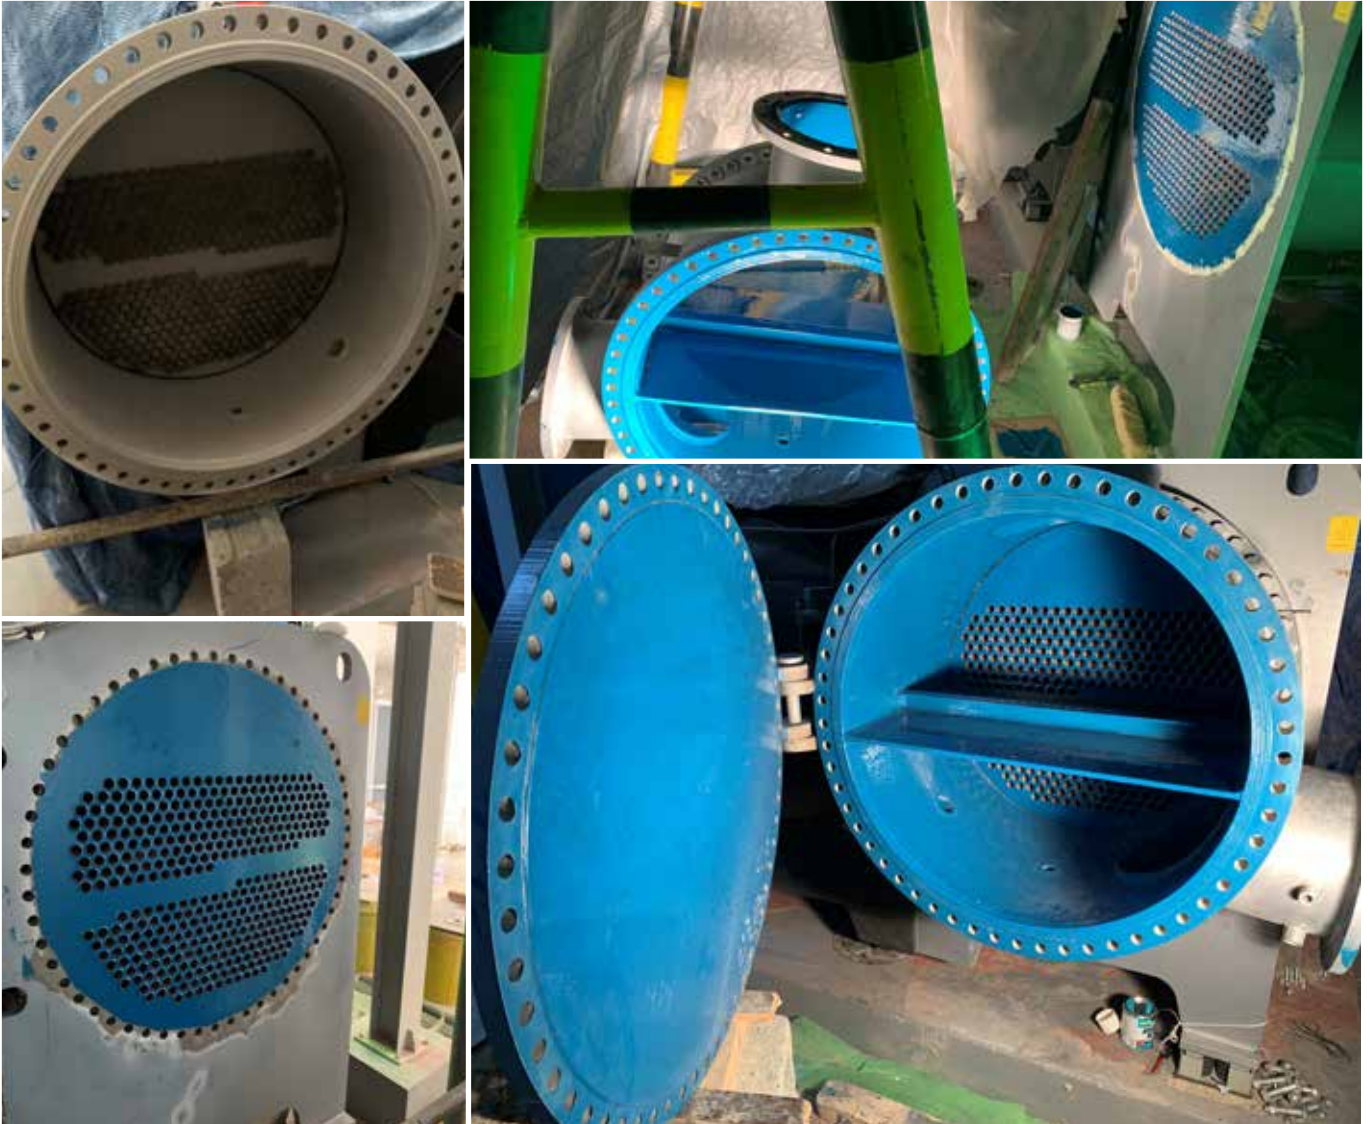

Description:

- ▶ pre-treatment with sandblasting (SA 2½)
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ first repair of damaged parts with WEICON HB 300
- ▶ final coating as wear protection with WEICON Ceramic BL



WEICON HB 300

- ▶ 0.5 kg 10450005
- ▶ 1.0 kg 10450010



WEICON Ceramic BL

- ▶ 0.5 kg 10400005
- ▶ 2.0 kg 10400020



Advantage of our solution:

- ▶ recommissioning of the shell and tube cooler
- ▶ avoiding a replacement, thus saving costs

Inner coating of pumps



Description:

- ▶ pre-treatment with sandblasting
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ repairing the cavitation and corrosion damages with WEICON HB 300
- ▶ final coating as wear protection with WEICON Ceramic BL

WEICON HB 300

- ▶ 0.5 kg 10450005
- ▶ 1.0 kg 10450010



WEICON Ceramic BL

- ▶ 0.5 kg 10400005
- ▶ 2.0 kg 10400020

Advantage of our solution:

- ▶ repairing worn pumps
- ▶ additional protection for new pumps
- ▶ cost-effective repair and long service life



Reproduction of a damaged damper foot



Description:

- ▶ production of a three-piece mould to recast the worn damper foot
- ▶ wetting of the mould with WEICON Mould Release Agent Liquid F 1000
- ▶ mixing of WEICON Urethane 60 and pouring into the mould (avoid air inclusions!)
- ▶ demoulding of the component after 24 h curing and installing it in the system



Mould Release Agent Liquid F 1000

▶ 1 L
10604000



Urethane 60

Shore hardness: A 60

▶ 500 g
10516005



Advantage of our solution:

- ▶ complete restoration of the vibration and shock absorption
- ▶ replacement, delivery times and thus downtime costs could be avoided

Repair of a tank lid



Description:

- ▶ removal of rust by sanding
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ sealing the damaged area with WEICON A



WEICON A

- ▶ 0.5 kg 10000005
- ▶ 2.0 kg 10000020

Advantage of our solution:

- ▶ avoiding welding
- ▶ fast, easy repair
- ▶ additional protective layer against new corrosion



Repair of the adapter sleeve of a shock absorber



Description:

- ▶ repair of the ring broken due to wrong assembly
- ▶ milling of small grooves with a diamond drill for gap bridging
- ▶ cleaning the surface with WEICON Cleaner Spray S
- ▶ generous application of WEICON Easy-Mix HT 180
- ▶ inserting the broken off piece
- ▶ removing the excess adhesive



Easy-Mix HT 180

- ▶ 50 ml
- ▶ 10650850



Advantage of our solution:

- ▶ alternative to welding
- ▶ cost-effective repair
- ▶ avoiding the replacement of the component

Bonding illuminated signs



Description:

- ▶ sealing the aluminium
- ▶ cleaning with WEICON Surface Cleaner
- ▶ sealing the housing corners of the light box with WEICON Flex 310 M® HT 200
- ▶ painting/powder coating the light box
- ▶ application of WEICON Primer K 200 in the letter area
- ▶ application of Flex 310 M® Classic
- ▶ inserting the illuminated signs (plexiglass)



WEICON Primer K 200

- ▶ 250 ml
- 13550225



Flex 310 M® Classic

- ▶ 310 ml
- 13303310
- white



Flex 310 M® HT 200

- ▶ 310 ml
- 13655310
- grey

VIDEO



Advantage of our solution:

- ▶ alternative to welding / no material distortion due to temperature
- ▶ elastic connection of the lighting elements
- ▶ high weather resistance (changes in temperature)



Sealing and attaching sockets in feed containers made of polyethylene



Description:

- ▶ drilling holes and cutting threads in polyethylene feed containers
- ▶ cleaning the thread of socket and valve with WEICON Surface Cleaner
- ▶ application of WEICON Easy-Mix PE-PP 50
- ▶ screwing in the socket and valve



Easy-Mix PE-PP 50

- ▶ 50 ml
- 10665050
- pale yellow, transparent

Dispenser D50

10663050

Quadro Mixing Nozzle

10650005



Advantage of our solution:

- ▶ high sealing effect
- ▶ good resistance to loosening
- ▶ easy and cost-effective assembly

Restoration of the rubber protective coating of a hydraulic line



Description:

- ▶ cutting out the damaged area
- ▶ masking the repair area to remove excess material before curing
- ▶ cleaning the surfaces with WEICON Cleaner Spray S
- ▶ application of WEICON Primer G to the repair area
- ▶ full-surface application of WEICON Urethane 85 to surface to be repaired



Primer G **NEW**

Special bonding agent for urethanes for the pre-treatment of rubber and metal surfaces

- ▶ 50 g
10809050



Urethane 85 **NEW**

Shore hardness: A 85

- ▶ 500 g
10800005
Work Package
- ▶ 540 g
10800540
Cartridge

Advantage of our solution:

- ▶ restoration of the protective coating
- ▶ safe and permanent operation of the system
- ▶ high adhesive strength and elasticity

Bonding of salt stones in a dry-aging cooling chamber



Description:

- ▶ cleaning the walls with WEICON Surface Cleaner
- ▶ application of WEICON Flex 310 M® Classic
- ▶ bonding the salt stones



Advantage of our solution:

- ▶ reliable adhesive with ISEGA certificate for use in the food industry
- ▶ easy assembly



Flex 310 M® Classic

- ▶ 310 ml
- ▶ 13303310
- white

Restoration of the edge mill of a pellet press



Description:

- ▶ sandblasting of the press container/edge mill
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ application of WEICON WR2 with spatula and smoothing trowel
- ▶ subsequent curing for 24 h at 60°C (industrial oven)
- ▶ sanding the surface of the applied material WEICON WR2
- ▶ application of the final coating with WEICON Ceramic BL with a customary foam roller



WEICON WR2

- ▶ 0.5 kg 10350005
- ▶ 2.0 kg 10350020



WEICON Ceramic BL

- ▶ 0.5 kg 10400005
- ▶ 2.0 kg 10400020

Advantage of our solution:

- ▶ maintenance and restoration of worn system components
- ▶ service life extension and sustainable use



Repair of a roller fender on a quay wall



courtesy and copyright of ShibataFenderTeam

Description:

- ▶ damages on a roller fender on a quay wall
- ▶ application of WEICON Primer G
- ▶ filling the damaged areas with WEICON Urethane 85



Primer G NEW

Special bonding agent for urethanes for the pre-treatment of rubber and metal surfaces

- ▶ 50 g
- 10809050



Urethane 85 NEW

Shore hardness: A 85

- ▶ 500 g
- ▶ 540 g
- 10800005
- 10800540
- Work Package
- Cartridge



Advantage of our solution:

- ▶ fast and cost-effective repair solution
- ▶ excellent mechanical strength and elasticity
- ▶ durable wear protection



Repair of a catamaran



Description:

- ▶ sandblasting (SA 2½) of the damaged areas
- ▶ application of WEICON HP
- ▶ final coating after curing with WEICON Ceramic BL
- ▶ 48 kg WEICON HP and 36 kg WEICON Ceramic BL were used on an area of 16 square metres



WEICON HP

- ▶ 0.5 kg 10390005
- ▶ 2.0 kg 10390020



WEICON Ceramic BL

- ▶ 0.5 kg 10400005
- ▶ 2.0 kg 10400020

Advantage of our solution:

- ▶ fast and precise repair
- ▶ reconditioning of the hull surface
- ▶ strengthening the material against new cavitation damages
- ▶ efficiency of the hull remains intact



Bonding ID chips to chip nest on waste bins



Description:

- ▶ cleaning the surfaces with WEICON Surface Cleaner
- ▶ bonding the transponder chips with WEICON Easy-Mix PE-PP 45



Easy-Mix PE-PP 45

▶ 45 ml
10660045

Dispenser PE-PP

10663038

Mixing Nozzles PE-PP

10660002

Special Piston

10663110

To convert the Dispenser Easy-Mix D 50 to Easy-Mix PE-PP 45



Advantage of our solution:

- ▶ high-strength, impact-resistant bonding of the low surface energy plastic polyethylene
- ▶ fast, durable and easy attachment of the chip



Bonding stainless steel sheets to aluminium



Description:

- ▶ cleaning with Cleaner Spray S
- ▶ full-surface bonding of the stainless steel sheets to the aluminium surface with WEICON Flex 310 M® Classic



Flex 310 M® Classic

▶ 310 ml
13305310
grey



Advantage of our solution:

- ▶ visually appealing bond
- ▶ high weather resistance
- ▶ high elasticity corresponding to thermal expansion

Gap compensation on a press plate in a quarry



Description:

- ▶ the support surface of a burst, 400kg heavy press plate did not show 100% force closure anymore
- ▶ previous solution: replacing the press plate every two months
- ▶ cleaning with WEICON Cleaner S
- ▶ generous application of WEICON HB 300 to the surface and fixings



Advantage of our solution:

- ▶ gap filling with WEICON HB 300
- ▶ avoiding having to replace the press plate
- ▶ cost savings of approx. 35,000 € – for the new press plates



WEICON HB 300

▶ 1.0 kg
10450010

Levelling an access ramp on a drive-through platform scale



Description:

- ▶ roughening the concrete surface with an angle grinder and subsequent suction of the grinding dust
- ▶ application of WEICON Primer G
- ▶ after allowing the primer to flash off for 20 minutes, application of WEICON Urethane 85
- ▶ levelling the surface (ramp angle) with a gage

VIDEO



Belt Repair-Kit 590

- ▶ 540 g + Primer G 50 g
- 10851015

Advantage of our solution:

- ▶ easy and quiet access
- ▶ optimising work safety
- ▶ minimising wear and tear on the wheels of industrial trucks



Bonding and coating a chair suspension



Description:

- ▶ complete sanding of the hot-dip galvanised surface with sandpaper
- ▶ cleaning with WEICON Surface Cleaner
- ▶ bonding the suspension with WEICON Easy-Mix RK-7100
- ▶ coating the suspension with WEICON Brushable Liquid Zinc Paint for an additional protective layer



Easy-Mix RK-7100

▶ 50 ml
10566050



Advantage of our solution:

- ▶ fast-curing, high-strength bond with residual elasticity
- ▶ particularly easy to apply thanks to the dosing system - even overhead
- ▶ The Brushable Liquid Zinc Paint serves as barrier layer and protects the adhesive bond against corrosion

Sealing a leak in a petroleum line



Description:

- ▶ sanding the damaged area
- ▶ cleaning with WEICON Cleaner S
- ▶ closing and sealing the damaged area with WEICON Repair Stick Steel
- ▶ stabilising, sealing and strengthening the damaged area with WEICON Repair-Tape



WEICON Pipe Repair-Kit

5/15

▶ 5 cm x 1.5 m

10710001

5/35

▶ 5 cm x 3.5 m

10710002

10/35

▶ 10 cm x 3.5 m

10710003

Advantage of our solution:

- ▶ fast and easy repair during ongoing operation
- ▶ avoiding welding and thus reducing potential danger (fire / explosion protection)
- ▶ solution resistant to pressure and substances



Bonding a door locking system in a bus



Description:

- ▶ pre-treatment with WEICON Cleaner Spray S
- ▶ bonding all components of the door locking system with WEICON Easy-Mix PE-PP 45 – both PP to PP and PP to glass



Easy-Mix PE-PP 45

▶ 45 ml
10660045

Dispenser PE-PP

10663038


Mixing Nozzles PE-PP

10660002

Special Piston

10663110

To convert the Dispenser Easy-Mix D 50 to Easy-Mix PE-PP 45



Advantage of our solution:

- ▶ fast and easy solution for demanding bonding of low surface energy plastics
- ▶ the adhesive bond easily withstands high stresses, such as opening and closing of the doors

Production of truck axles



Description:

- ▶ cleaning with WEICON Cleaner Spray S
- ▶ securing the screws on the differential gear with WEICONLOCK AN 302-71
- ▶ sealing the differential with WEICON Black-Seal
- ▶ sealing the vehicle components with WEICON Flex 310 M® 2 K



AN 302-71

- ▶ 20 ml 30271020
- ▶ 50 ml 30271150
- ▶ 200 ml 30271200



Flex 310 M® 2 K

- ▶ 250 ml 13305250 grey
- ▶ Special mixing nozzle 13309997



Black-Seal Special Silicone

- ▶ 200 ml 13051200 Press Pack

Advantage of our solution:

- ▶ the high-strength threadlocker, which is hard to disassemble and has a medium viscosity, withstands very high stresses
- ▶ good resistance of the silicone WEICON Black-Seal to gear oil
- ▶ full-surface bonding and bridging bonding gaps up to ten millimetres with WEICON Flex 310 M® 2 K



Bonding roller cones



Description:

- ▶ roughening the inside of the rollers with a drill and a brush attachment
- ▶ cleaning the roughened surfaces with WEICON Surface Cleaner
- ▶ use of WEICONLOCK AN 306-30 for Retaining Cylindrical Assemblies

Advantage of our solution:

- ▶ adhesive withstands high rotation speeds and thus large torsion forces
- ▶ good suitability of WEICONLOCK AN 306-30 for the passive material combination aluminium and stainless steel
- ▶ easy and precise application thanks to the ergonomic WEICON Pen-System



AN 306-30

- ▶ 20 ml
30630020
- ▶ 50 ml
30630150
- ▶ 200 ml
30630200

Repair of oil pipelines



Description:

- ▶ corrosion damages due to stony layers and extreme temperature fluctuations on the pipes
- ▶ cleaning the damaged areas with WEICON Cleaner Spray S
- ▶ application of nearly one ton of WEICON HB 300 to 100 kilometres pipeline
- ▶ after curing additional wrapping with protective foil or coating with carbon fibre



WEICON HB 300

▶ 1.0 kg
10450010

Advantage of our solution:

- ▶ inexpensive and long-lasting solution
- ▶ on-site repair – despite the ambient temperature and temperature of the streaming oil
- ▶ fast and easy application of WEICON HB 300



Repair of the piping of a limestone filter system



Description:

- ▶ pipes lined with rubber on the inside
- ▶ damages caused by abrasion due to the limestones
- ▶ first, application of WEICON WP in combination with steel plates
- ▶ then additional fixation of the damaged areas with WEICON Pipe Repair-Kit



WEICON WP

- ▶ 2.0 kg 10490020
- ▶ 10.0 kg 10490100



WEICON Pipe Repair-Kit

- | | | |
|----------------|----------------|-----------------|
| 5/15 | 5/35 | 10/35 |
| ▶ 5 cm x 1.5 m | ▶ 5 cm x 3.5 m | ▶ 10 cm x 3.5 m |
| 10710001 | 10710002 | 10710003 |



Advantage of our solution:

- ▶ high wear protection thanks to the WEICON WP and additional stability due to steel plates
- ▶ increased service life compared to a new connection piece

Mill lining



Beschreibung:

- ▶ mill lining with the epoxy resin systems WEICON WAL 04 and WEICON WAL 06
- ▶ WEICON WAL 04 is used for the round arch and WEICON WAL 06 for the front and end wall, as a higher dynamic load capacity is required there
- ▶ bonding gap: max. 5 mm



WEICON WAL 04

▶ 2.0 kg
10470020

WEICON WAL 06

▶ 2.0 kg
10480020



Advantage of our solution:

- ▶ high resistance of the epoxy resin systems
- ▶ high temperature resistance and high mechanical strength

Bearing repair on a crane runway



Description:

- ▶ heavy signs of wear on a crane runway due to erosion
- ▶ previous solution: repair with fitting pieces
- ▶ the heterogenous grinding of the concrete due to micro-vibrations was reconstructed with the casting of WEICON CBC



Injection Packer Set

- ▶ System for gap compensation on bridges, pillars, machines, and plants
- 10851020



WEICON CBC Chocking Backing Compound

- ▶ 3.0 kg (2.0 l) ▶ 10.0 kg (6.6 l)
- 10110030 10110110



Advantage of our solution:



- ▶ WECON CBC forms a direct and frictional contact to the foundation
- ▶ no cure shrinkage, high impact strength, very good resistance to pressure, media and ageing
- ▶ restoring the static properties of the crane runway





WEICON®

Simply find solutions.

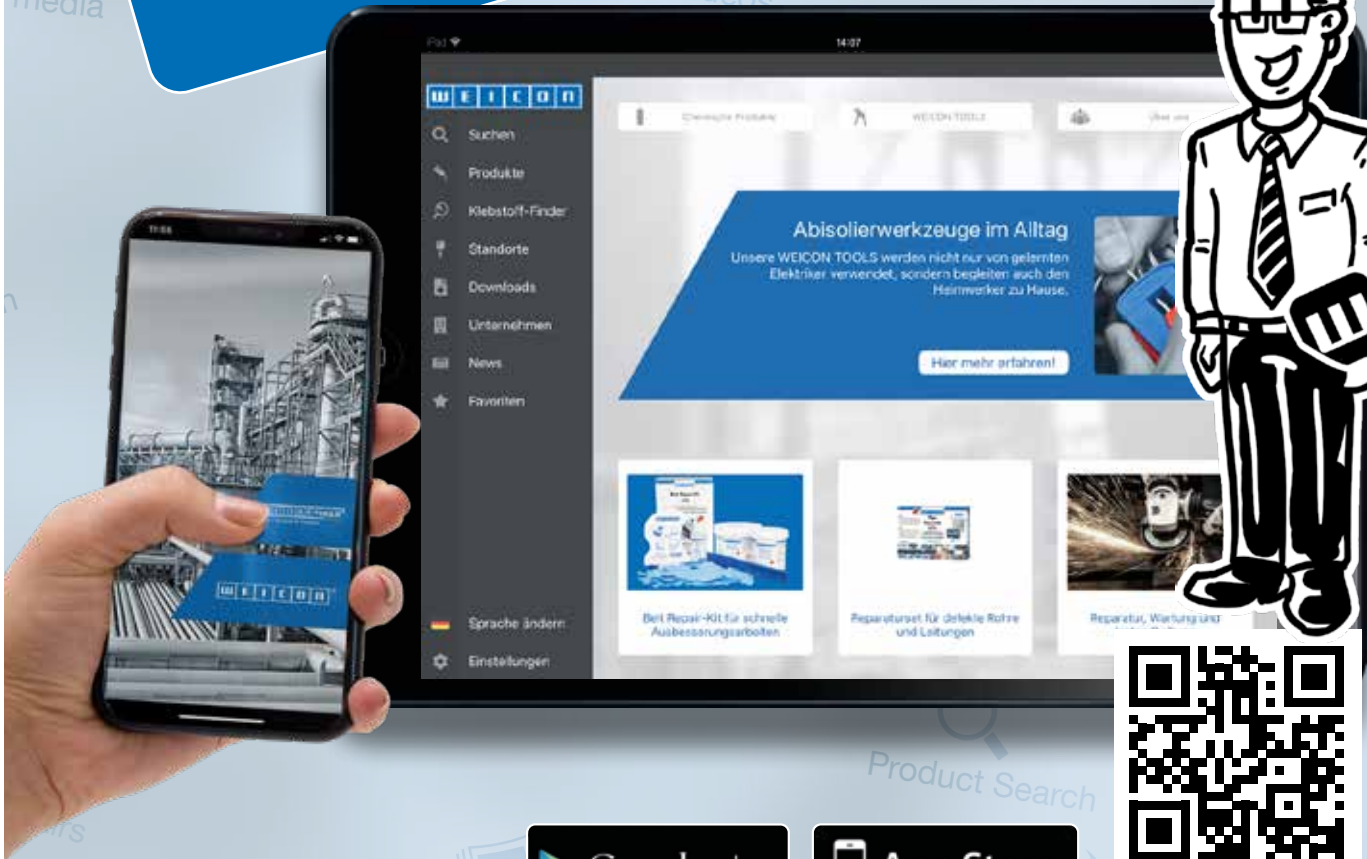

weicon.de/service/app



You Tube



www.weicon.com

WEICON GmbH & Co. KG
(Headquarters)

Königsberger Str. 255 · DE-48157 Münster
P.O. Box 84 60 · DE-48045 Münster
Germany
phone +49 (0) 251 9322 0
WhatsApp + 49 (0) 251 9322 393
info@weicon.de

WEICON Middle East L.L.C.

Jebel Ali Ind Area 1
P.O. Box 118 216 · Dubai
United Arab Emirates
phone +971 4 880 25 05
info@weicon.ae

WEICON Inc.

20 Steckle Place · Unit 20
Kitchener · Ontario N2E 2C3 · Canada
phone +1 877 620 8889
info@weicon.ca

WEICON Kimya Sanayi Tic. Ltd. Şti.

Orhan Gazi Mahallesi 16. Yol Sokak No: 6
34517 Hadimköy-Esenyurt · Istanbul
Turkey
phone +90 (0) 212 465 33 65
info@weicon.com.tr

WEICON Romania SRL

Str. Podului Nr. 1
547176 Budiu Mic (Targu Mures) · Romania
phone +40 (0) 3 65 730 763
office@weicon.com

WEICON SA (Pty) Ltd

Unit No. D1 · Enterprise Village
Capricorn Drive · Capricorn Park
Muizenberg 7945 (Cape Town) · South Africa
phone +27 (0) 21 709 0088
info@weicon.co.za

WEICON South East Asia Pte Ltd

7 Soon Lee Street
#01-11 iSPACE · Singapore 627608
Phone (+65) 6710 7671
info@weicon.com.sg

WEICON Czech Republic s.r.o.

Teplická 305
CZ-417 61 Teplice-Bystřany
Česká republika
phone +42 (0) 417 533 013
info@weicon.cz

WEICON Ibérica S.L.

Av. de Somosierra 18, Nave 6
San Sebastián de los Reyes
28703 Madrid · Spain
phone +34 (0) 914 7997 34
info@weicon.es

WEICON Italia S.r.L.

Via Capitano del Popolo, 20
16154 Genova · Italy
phone +39 (0) 010 2924 871
info@weicon.it

www.weicon.com



Management System
ISO 9001:2015
ISO 14001:2015

www.tuv.com
ID 9108636595



WEICON

**APPLICATIONS
AND PRODUCTS**

Art.-No. 10906302

Distributed by:

Any product specifications and recommendations given herein must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The manufacturer is not responsible for non-appropriate or other than specified applications.
FSM/10306302/08/21/