



Stainless Steel



STAINLESS STEEL

Member of the German stainless steel Association

WARENZEICHENVERBAND EDELSTAHL *Rostfrei* E.V.









www.weicon.com



Thread Sealing Cord DF 175

WEICON DF 175 is a patented Thread Sealing Cord made of 100% PTFE that seals almost all metal and plastic threads permanently and safely. WEICON DF 175 reliably compensates the intermediate space on the threads and creates a PTFE film in the required thickness during the screwing procedure.

- Seals immediately, temperature range -200°C to +240°C (-328 to +464°F)
- Drinking water approvals according to NSF, KTW and WRAS
- 100 % solid PTFE, silicon-free

NSF

30010175



anne

100

100

LOOK

MITTER D

(het

AN 306-30

Contact Cyanoacrylate Adhesive

WEICON Contact is a solvent-free instant adhesive. It connects various materials with and among each other, e.g. metal, glass, wood, plastic, ceramic, leather and rubber.

VA 2500 HT

- High peel and impact strength
- · Cures with residual elasticity
- -50°C to +140°C (high-temperature resistant)





*1Certificate on DIN-DVGW test symbol for DF 175 in gas systems.

*2Test certificate confirming that the requirements of the KTW recommendations (drinking water) of the German Federal Health Office (Bundesgesundheitsamt) are met in the area of the D2 seal.

*3Test reports on the suitability of the Thread Sealing Cord and the WEICONLOCK AN 306-30 adhesive and sealant for applications with oxygen.

**Certificate on the suitability for use on gas-powered terminal equipment for the WEICON Thread Sealing Cord.

Stainless Steel

WEICONLOCK® - Anaerobic Adhesives and Sealants

Especially designed for economical threadlocking, retaining and sealing of threaded, cylindrical and pipe assemblies. After curing, the

adhesive bonding is resistant to vibration, impact, chemicals, solvents and temperatures from -60°C to +150 °C.

· Requires no activator

hard to disassemble

Threadlocking for passive materials^{*5}

medium-viscosity • high-strength

AN 302-60

50 ml 🧹

30260150



- threadlocking
- NSF drinking water certificate
 ANSI Standard 61 and DVGW-approval

higher-viscosity • medium-strength disassembly with normal tools

50 ml 🕤

AN 305-78

- Pipe and thread sealing for passive materials^{*5}
- Requires no activator

high-viscosity • medium-strength disassembly with normal tools

50 ml 🕤

*5



50 ml 🧹

30244150

AN 302-44

· Requires no activator

 Retaining cylindrical assemblies for passive materials^{*5}

he Aktiv

Threadlocking for passive materials^{*5}

higher-viscosity • medium-strength

disassembly with normal tools


· Requires no activator

higher-viscosity • high-strength hard to disassemble

50 ml 🗹 30630150

Passive materials: • High-alloy steel (slow curing) • Aluminium nick

- Aluminium, nickel, zinc and gold
- Oxide layers
- Chromate layers
- Anodic coatings
- Plastics and ceramic

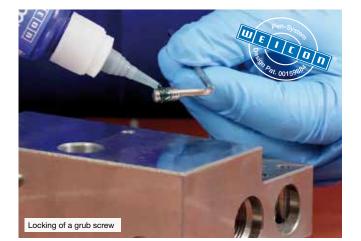



Bonding in and locking screw connections of a pressure unit



Bonding a stainless-steel screw into a housing



Anti-Seize High-Tech

All kinds of influencing factors, such as moisture and friction, lead to damage due to corrosion, seizure, and wear on machines and installations.

Extensive repair and maintenance work at considerable cost are the result.

Especially under critical conditions of application, such as:

- High operation temperatures
- High pressure loads
- Outdoor weather conditions

such consequences frequently occur.

WEICON Anti-Seize assembly pastes are especially developed for these requirements. They are used as protecting and separating agents, as well as lubricants, for highly stressed parts, especially at high temperatures.

Optimally balanced solid contents as well as selected additives permit a wide range of applications, especially in this area.



Anti-Seize High-Tech • White high-temperature assembly paste • Metal-free • NSF-H1 approval



Spray

400 ml 🧹 450 g 🗹 27050400 26100045

Flex 310 M[®] Stainless-Steel

Can

Flex 310 M Stainless Steel is an elastic adhesive on MS polymer basis and is suitable for adhesive bonding, seam and joint sealing on metal, such as stainless steel, aluminium and non-ferrous metals. Flex 310 M Stainless Steel can also be used wherever the colour of the sealant and adhesive shall match the material (e.g. stainless steel, aluminium, etc.).

> Non-corrosive Stainless steel appearance







Stainless Steel

RK-1300/RK-1500 Structural Acrylic Adhesives

WEICON RK-1300/RK-1500 Structural Adhesives are methacrylatebased 2-component systems that harden quickly cure at room temperature.

The systems are processed using the "No Mix" method, i.e. it is not necessary to mix the two components (adhesive and activator). Curing does not start until the workpieces coated with the adhesive and activator are joined.

RK-1300

- Pasty, high-strength, fast-curing
- For large areas
- Temperature-resistant from -50°C to +130°C 60 g*1 1.0 kg*1

10560800



*1Complete package, consisting of adhesive and activator



- Liquid, high-strength, fast-curing
- For large areas
- Temperature-resistant from -50°C to +130°C

1.0 kg*1 🥑 10563800







Easy-Mix RK-7000

WEICON Easy-Mix RK-7000 connects many materials, such as plastics, metals, wood or ceramic, with high tensile, shear and impact strength.

WEICON Easy-Mix RK-7000 can be used universally and, for example, in plastics technology, metal construction, car body and vehicle construction, machine construction, electrical engineering, wood processing and in trade show and exhibition construction.

- Highly viscous, high-strength, impact-resistant, residual elasticity
- Pot life: approx. 12 minutes
- Temperature-resistant from -50°C to +130°C







Technical Sprays and Technical Liquids

Technical Sprays and Liquids are used in nearly all areas of industry.

They are used for the care and protection of surfaces, for cleaning, degreasing, lubricating, releasing, separating and are an indispensable part of day-to-day work.

Surface Cleaner

- · For pretreatment of bonding surfaces
- Evaporates quickly without residues

51 🍼 15207005

• For metal and plastic

400 ml	V
11207400	

Stainless Steel Spray bright grade

- With non-corrosive stainless steel pigments
- Provides a stainless steel look
- Temperature-resistant from -50°C to +300°C

400 ml 🥑 11104400

Stainless Steel Spray

- Extremely high resistance to chemicals
- Temperature-resistant from -50°C to +300°C

400 ml 🥑 11100400



plastic and wood

NSF approval

400 ml 🗹

11580400

Neutral pH

400 ml 🗹

11590400

• For stainless steel, ceramic, glass,

51 🗹

• For brushed and polished stainless-steel

15580005

Stainless Steel Care Spray


surfaces, also outdoors

Nonfood Compounds Program Listed A7;C1 (NSF) • For matt and polished surfaces

Cleaning and care even in sensitive areas

Cleaning and care of lifts

- Bio-Fluid Nonfood Compounds Program Listed H1
- High lubricating effect, with creeping properties
- Highly pure medical white oil NSF-H1 approval*



Spray-on Grease H1

Nonfood Compounds Program Listed H1

- White high-temperature grease
- Odourless and tasteless
- NSF-H1 approval*

400 ml 🥑 11541400







6

Stainless Steel

Repair Sticks

The simple solution for all repair and maintenance work. Easy to use. Can also be portioned for small repairs at any time.

Aqua

- For underwater applications
- Ceramic-filled 115 g 🥑

10531115

Non-corrosive, fast-curing

Stainless Steel


- Stainless steel-filled
- NSF drinking water approval **ANSI Standard 61**

Certified to NSF/ANSI 61

NSF





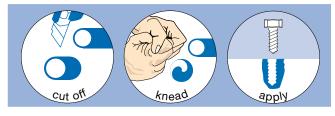



WEICON Plastic Metal ST

WEICON ST is suitable for a broad range of repairs and touch-up work on stainless-steel machine parts and workpieces, such as tanks, lines, containers, funnels and flanges.

WEICON ST can be used in the chemical industry, in the entire marine and inland shipping sector, in sewage plants, in the paper industry and in many other sectors.

Temperature-resistant from -35 to +120°C (-31 to +248°F).

- Pasty
- Stainless steel-filled
- Non-corrosive

0.5 kg 🥑	2.0 kg 🗹
10410005	10410020







WEICON GmbH & Co. KG (Headquarters)

Königsberger Str. 255 · DE-48157 Münster P.O. Box 84 60 · DE-48045 Münster Germany

> phone +49 (0) 251 9322 0 info@weicon.de

WEICON Middle East L.L.C.

Jebel Ali Ind Area 3 P.O. Box 118 216 · Dubai United Arab Emirates phone +971 4 880 25 05 info@weicon.ae

WEICON Inc.

20 Steckle Place · Unit 20 Kitchener · Ontario N2E 2C3 · Canada phone +1 877 620 8889 info@weicon.ca

WEICON Kimya Sanayi Tic. Ltd. Şti.

Orhan Gazi Mahallesi 16. Yol Sokak No: 6 34517 Hadımköy-Esenyurt · Istanbul Turkey phone +90 (0) 212 465 33 65 info@weicon.com.tr

WEICON Romania SRL

Str. Podului Nr. 1 547176 Budiu Mic (Targu Mures) · Romania phone +40 (0) 3 65 730 763 office@weicon.com

WEICON SA (Pty) Ltd

Unit No. D1 · Enterprise Village Capricorn Drive · Capricorn Park Muizenberg 7945 (Cape Town) · South Africa phone +27 (0) 21 709 0088 info@weicon.co.za

WEICON South East Asia Pte Ltd

5 Soon Lee Street Pioneer Point #03-56 · Singapore 627607 phone (+65) 6710 7671 info@weicon.com.sg

WEICON Czech Republic s.r.o.

Teplická 305 CZ-417 61 Teplice-Bystřany Česká republika phone +42 (0) 417 533 013 info@weiconcz.cz

WEICON Ibérica S.L.

Av. de Somosierra 18, Nave 6 San Sebastián de los Reyes 28703 Madrid phone +34 (0) 914 7997 34 info@weicon.es

weicon.com



Management System ISO 9001:2015

www.tuv.com ID 9108636595



WEICON Solutions for

Stainless Steel

Art.-No. 11900505

Distributed by: